




3/4" DIA Angled Lucite Drawer Pull

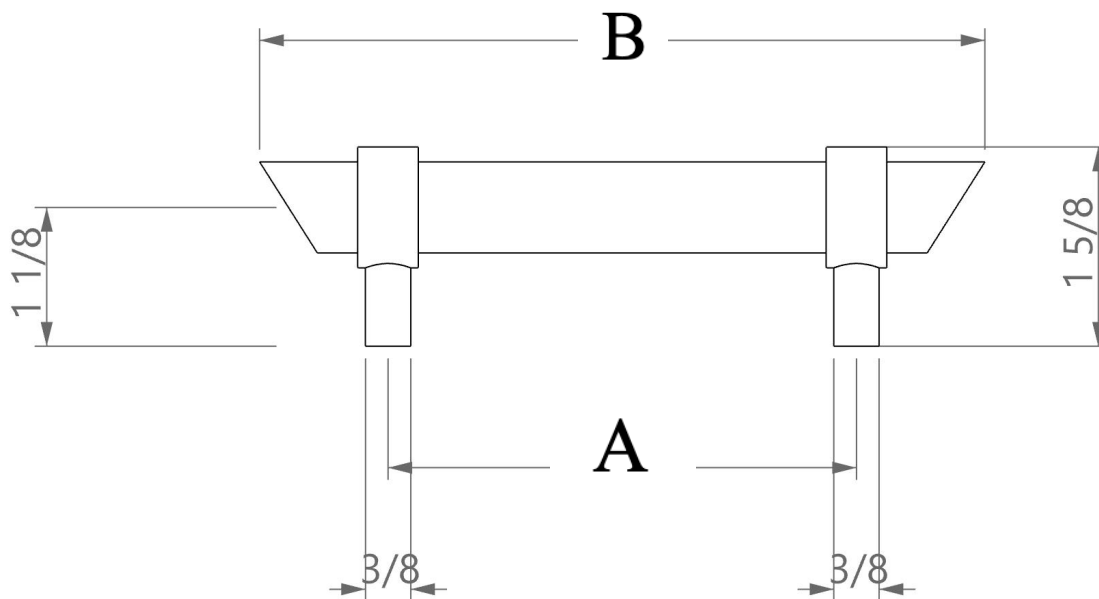

Center to Center (A)	Toggle	5"	6"	7"	8"	9"	10"	11"	12"	13"
Overall Length (B)	3.75"	7"	8"	9"	10"	11"	12"	13"	14"	15"

HARDWARE FINISHES	LUCITE FINISHES	ALSO INCLUDED
polished brass	clear	For pulls with two posts: 2 x 1-1/4" machine screws For toggle pulls: 1 x 1-1/4" machine screw
satin brass	night	
polished nickel	smoke	
satin nickel	matte smoke	
chrome		

INSTALLATION INSTRUCTIONS

- ❖ Determine hole spacing by measuring your pull from the center of one mounting hole to the center of the other mounting hole.
- ❖ Mark holes on your cabinet using a pencil, making sure that they are square level to your surface.
- ❖ Drill holes using #16 drill bit (or 3/16").
- ❖ Position pull in front of hole, then push the screw through from the interior side into the pull's screw hole.
- ❖ Fasten screw by hand using a screwdriver. Be careful not to over tighten as this will strip the screw.

CARE INSTRUCTIONS

- ❖ Brass, Nickel and Chrome: Use a non-abrasive brass polish such as Brasso wadding or Nevr-Dull wadding.
- ❖ Lucite: Dish soap and water.