



Erica Burns Interior

Hardware

- Polished Brass
- Satin Brass
- Polished Nickel
- Satin Nickel

Bracketing

- 2 Brackets: 12" - 48"
  - 3 Brackets: 49" - 96"
  - 4\* or 5\* Brackets: 97" - 168"
- (\*Curtains cannot fully draw)

Care Instructions



Metal: Use a non-abrasive brass polish wadding, such as Brasso or Nevr-Dull.

Lucite: Clean with a soft cloth, using only dish soap and water.


Hardware Included

Oval head #8 wood screws (2 per bracket).

Finials and rings are sold separately.

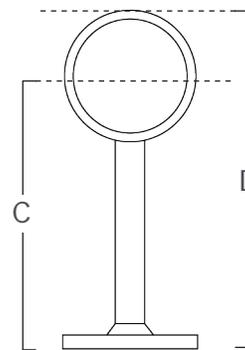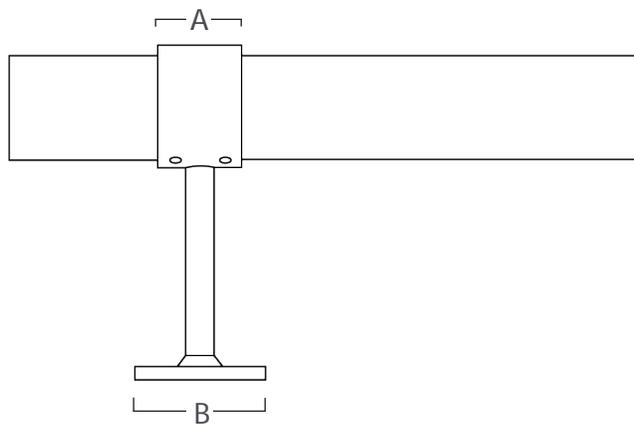

Loop Bracket

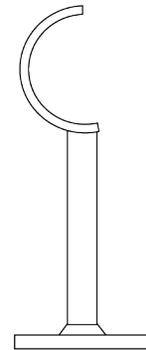

Halfmoon Bracket

ITEM	A	B	C	D
Brackets	1.12"	1.75"	3.62"	4.43"




1.37" LUCITE CURTAIN ROD BRACKETING DIAGRAM

TECH SPEC

RODS 12" - 48"

Placement A.1


2 loop brackets and 1 rod

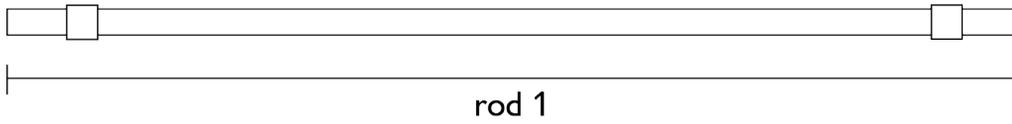

RODS 49" - 96"

Placement B.1


3 loop brackets and 1 rod\*

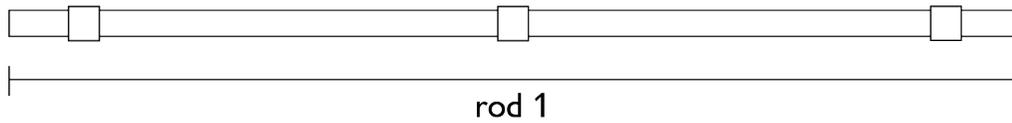

RODS 97" - 168"


Placement C.1\*\*

3 loop brackets, 2 halfmoon brackets and 2 rods

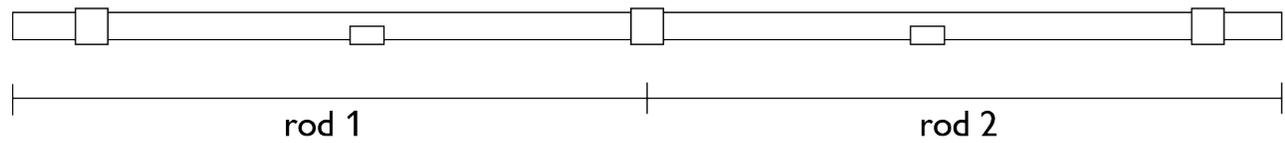


Placement C.2\*\*\*

5 loop brackets and 2 rods

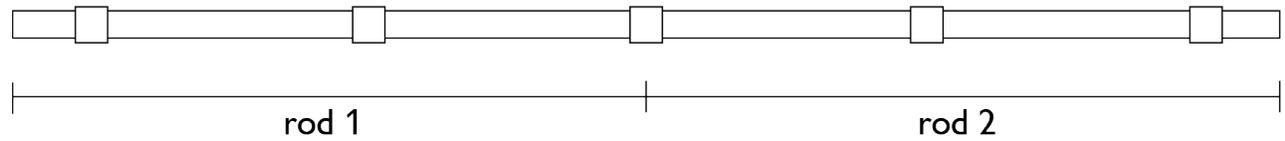

Placement C.3\*\*

4 loop brackets and 3 rods

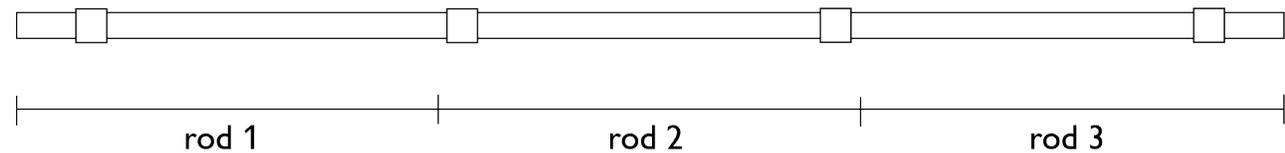

\*For shipping, ease of assembly, and safety, curtain rods greater than 48" may be split into smaller lengths to be joined together at a bracket.

\*\*This option allows for curtains to fully draw if paired with C rings. Any part of the curtain that needs to bypass a halfmoon bracket needs a C ring; the remaining rings should be full rings (typically a 50/50 ratio).

\*\*Curtains cannot fully draw.

