




1/2" DIA Lucite Drawer Pull

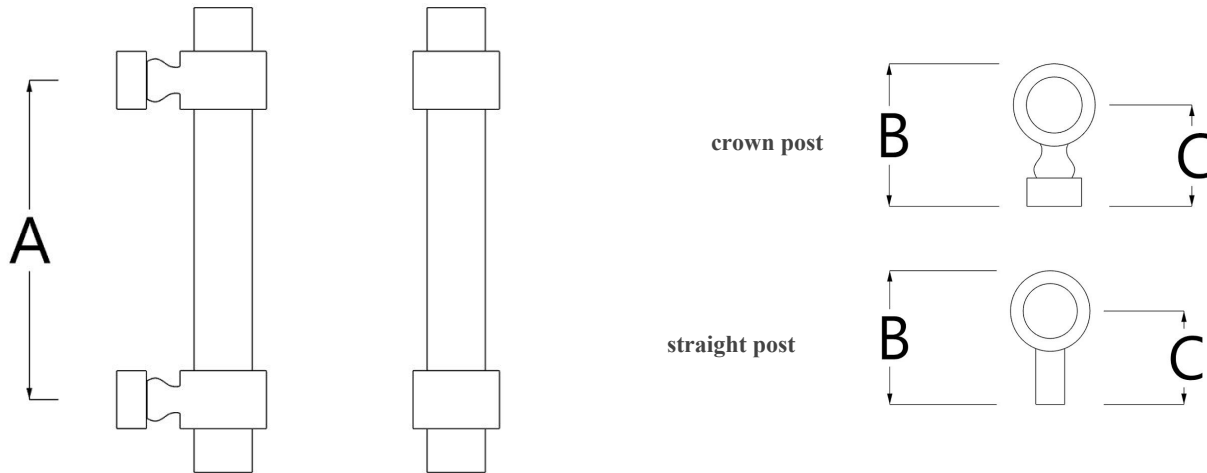

Post type	B (overall height)	C (projection)
Straight	1-1/4"	7/8"
Crown	1-5/16"	15/16"

Center to Center (A)	Toggle	4"	5"	6"	7"	8"	9"	10"	11"
Overall Length	2-3/8"	5-1/4"	6-1/4"	7-1/4"	8-1/4"	8-1/4"	10-1/4"	11-1/4"	12-1/4"

HARDWARE FINISHES	LUCITE FINISHES	ALSO INCLUDED
polished Brass	clear	For pulls with two posts: 2 x 1-1/4" machine screws For toggle pulls: 1 x 1-1/4" machine screw
satin Brass		
polished nickel		
satin nickel		
chrome		

INSTALLATION INSTRUCTIONS

- ❖ Determine hole spacing by measuring your pull from the center of one mounting hole to the center of the other mounting hole.
- ❖ Mark holes on your cabinet using a pencil, making sure that they are square level to your surface.
- ❖ Drill holes using #16 drill bit (or 3/16").
- ❖ Position pull in front of hole, then push the screw through from the interior side into the pull's screw hole.
- ❖ Fasten screw by hand using a screwdriver. Be careful not to over tighten as this will strip the screw.

CARE INSTRUCTIONS

- ❖ Brass, Nickel and Chrome: Use a non-abrasive brass polish such as Brasso wadding or Nevr-Dull wadding.
- ❖ Lucite: Dish soap and water.